

Tender specification:

“Copert” PE-RT plastic pipes


for surface heating and cooling systems.

PE-RT pipes according to DIN 16833, DIN 16834, DIN 4721, oxygen tight according to DIN 4726

Minimum bending radius: 5 x outer diameter

Dimension	Max. operating pressure p _s : at 70°C
14 x 2 mm	6 bar
16 x 2 mm	6 bar
17 x 2 mm	6 bar
20 x 2 mm	6 bar

“Copex” PE-RT plastic pipes on rolls					
Item no.	Dim.	Length per roll	Core Ø of roll	Outer Ø roll	Height of roll
140 20 52	14 x 2	240 m	430 mm	750 mm	190 mm
140 20 54	14 x 2	600m	410 mm	840 mm	300 mm
140 21 52	16 x 2	240 m	480 mm	750 mm	250 mm
140 21 54	16 x 2	600 m	390 mm	890 mm	300 mm
140 22 52	17 x 2	240 m	480 mm <td>780 mm</td> <td>250 mm</td>	780 mm	250 mm
140 22 54	17 x 2	600 m	430 mm	960 mm	320 mm
140 23 52	20 x 2	240 m	410 mm	800 mm	300 mm

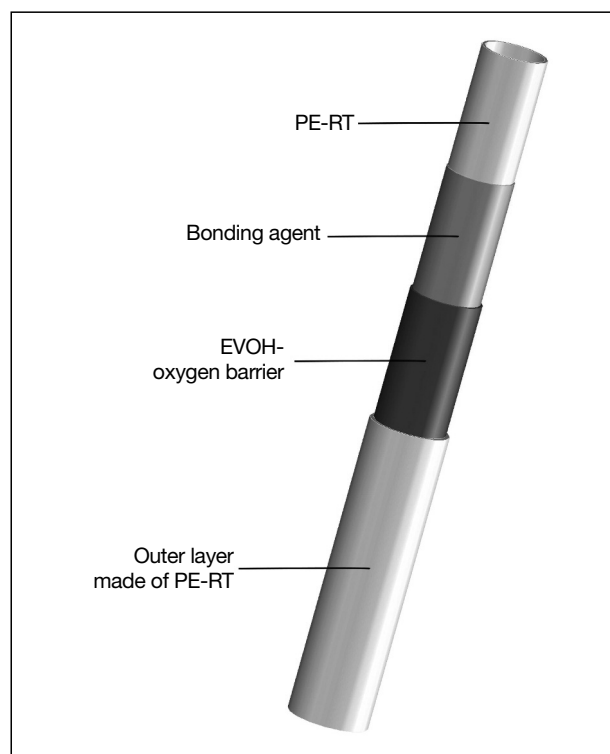

“Copert” PE-RT plastic pipe

Subject to technical modification without notice.

Product range 13
ti 277-1/20/MW
Edition 2012